



TEXAS A&M

HEALTH SCIENCE CENTER

Cisco IP Telephone & Unity User's Guide



Table of Contents

General Information about Placing Calls.....	3
Configuring Voicemail	4
Retrieving Voicemail.....	4
Forwarding Calls.....	5
Selecting Calls	5
Viewing Calls and Switching Between Calls	6
Transfer a Call.....	8
<i>Transfer a Call Directly to Voicemail.....</i>	8
Placing a Conference Call.....	8
<i>Remove Conference Participant.....</i>	9
<i>View Conference List.....</i>	9
<i>Join</i>	9
Using the Mute Button.....	10
Customizing the Phone Settings.....	10
Making Calls from the Corporate Directory.....	11
Using the Call History.....	12
Help and Support	13

General Information about Placing Calls.

In Case of an Emergency:

Dial 911

To Contact the Campus Security Office:

Round Rock: 14200

(512) 341-4200

Bryan: 69000

(979) 436-9000

Houston (Alkek): 77464

(713) 677-7464

To Dial an Outside Line:

Dial "8" then the number.

To make a long distance call:

Dial "8" then "1" then the area code and number.

Configuring Voicemail

1. Press the **Messages** button located to the right of the navigation keypad.
2. Enter 1234567.
3. Continue following the voice instructions. (NOTE: after recording the name and/or a new greeting, press the pound key (#) to stop recording.

Forwarding calls to voice mail

If a call is not answered after 4 rings, the call will automatically be forwarded to voice mail. Follow the directions below to forward all calls to the voice mail system.

1. Press the **CFwdALL Softkey**.
2. Press the **Messages** mode button. After a brief pause the phone line will automatically turn on the voicemail system. A notice will appear at the bottom of the LCD screen stating that calls have been forwarded to voicemail.

Canceling voice mail forward

1. Press **CFwdAll Softkey**.

Retrieving Voice Mail Messages

The red light on the phone's handset lights up when there is a voice mail message. The LCD screen displays the number of messages that have been received.

1. Press the **Messages**  button and follow the voice instructions.

Accessing voicemail from an outside line

1. Dial your number. When your voicemail picks up press *
2. Enter your 5 digit extension then press #.
3. Next, enter your pin, and then press #.

Forwarding Calls to another number

1. Press the **CFwdAll Softkey**.
2. Dial the local number to which calls should be forwarded.
3. After a brief pause, a notice will appear on the bottom of the LCD screen stating that calls have been forwarded to that number.

To Turn Off Forwarding

1. Press the **CFwdAll Softkey**

Selecting Calls

Many phone features require that you select the calls you want to use with a particular feature. For example, if you have four held calls, but only want to join two of them to a conference call, you can select the calls that you want to add to the conference before activating the feature.


Highlight a call: Use the Navigation button to scroll through the call list. Highlighted calls appear slightly darker than other calls.

Select a call:

Highlight a connected or held call and press **Select**. You may need to push the **More** softkey to find the **Select** softkey.

Then Verify selected calls:

Use the Navigation button to scroll through the list of calls. Selected calls are grouped together in the call list

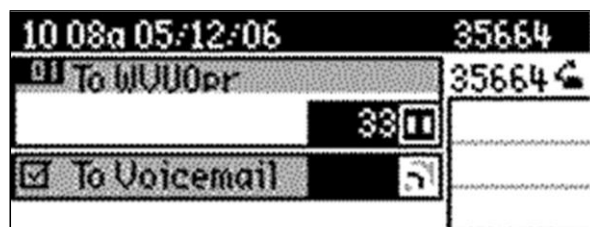

Viewing Calls and Switching Between Calls

These tips can help you switch between calls on one or more lines. If the call you want to switch to is not automatically highlighted, use the Navigation button to scroll to it.

Tips

- Only one call can be active; other calls will be placed on hold automatically.
- When you have multiple calls on one line, calls with the longest duration display at the top of the call list.
- Calls of a similar type are grouped together in the call list. For example, calls that you have interacted with are grouped near the top, selected calls are grouped next, and calls that you have not yet answered are grouped last.

If you want to:


Switch between calls on one line:

Highlight the call you are switching to and press **Resume**. The other call is placed on hold automatically.

Switch from a connected call to answer a ringing call...

Press **Answer** or press the corresponding button for the line with the incoming call. Doing so automatically places the first call on hold.

Switch between calls on different lines:

Press the corresponding button for a line that has a call on hold. (The line displays the call-on-hold icon .) If there is a single call holding on the line, it will resume automatically. If there are multiple calls holding on the line, scroll to the specific call (if necessary) and press **Resume**.

To place or answer calls using the headset 

The headset must be Plantronics H series compatible.

1. Plug the approved headset into the back of the phone base.
The headset jack is located on the lower right side of the back of the phone, directly above the handset jack.
2. To place a call using the headset, press the **Headset** button on the lower right corner of the phone base and dial the number.
3. To hang up, press the **Headset** button on the lower right corner of the phone base.
4. To answer a call using the headset, press the **Headset** button on the lower right corner of the phone base.
5. To hang up, press the **Headset** button again.
(Some wireless headsets might have different directions)

Redialing the most recently called number

1. Lift the **Handset**.
2. Press the **Softkey** for **Redial**.

To place a caller on hold:

1. When a call is active, the word **Hold** will appear along the bottom of the LCD screen. Press the **Hold Softkey** located directly below the word **Hold** on the LCD screen to place the caller on hold.
2. To return to that call, press the **Softkey** located directly below the word **Resume** on the LCD screen.

To place a caller on hold and then call another person on a second line:

1. Press the **Softkey** located directly below the word **Hold** on the LCD screen to place the caller on hold.
2. Press the **Softkey** located directly below the words **New Call** on the LCD screen to get a dial tone.
3. Dial the desired number.
4. To return to the first caller, press the **Softkey** located directly below the word **Hold** on the LCD screen which will place the second caller on hold.
5. Press the **Up or Down scroll arrows**, located below the LCD screen to highlight the original caller's ID.
6. Press the **Softkey** located directly below the words **Resume** on the LCD screen to return to the original caller.
7. To end the call, press the **Softkey** located directly below the words **End Call** on the LCD screen to drop the active caller.
8. Press the **Up or Down scroll arrows**, located below the LCD screen to highlight the remaining caller's ID.
9. Press the **Softkey** located directly below the word **Resume** on the LCD screen to return to the selected caller.

Using multiple lines

On some phones, multiple lines may be available. Callers

are automatically put on hold when a user moves from one line to another. The buttons for the different available lines are located on the right hand side of the LCD screen. A telephone icon is displayed on the screen for each line.

Transfer a Call


1. To transfer an active call, press the **Softkey** located directly below **Transf.** on the LCD screen.
 2. Dial the number to which the call is to be transferred.
 3. Once the line begins to ring, push the **Transf.** key again or wait until the party answers, announce the call, and then press the **Transf.** key.
 4. Hang up to end involvement in the call.
- Note: If you need to cancel your transfer (such as the person you are transferring the call to does not answer), press the **End Call** softkey to end that call and then press **Resume** to return to your original call.

Transfer a Call Directly to Voicemail

1. Press the **Transfer Softkey**.
2. Then the 5 digit phone number. Ex: **33333
3. Press the **Transfer Softkey** again to complete the transfer.

Placing a Conference Call

1. Place the initial call.
2. Press the **Softkey** located directly below the word **more** until **Confrn** is visible. The caller is automatically on hold and a new line is opened.
3. Dial the new party.
4. After the call is answered, press the **Confrn Softkey** again. This will add the second party to the call.
5. Repeat steps 2-4 to access more participants to the conference call. (NOTE: when the initiator of the conference call disconnects, the call is terminated. If the hold button is used by the initiator, the other parties cannot talk to each

other. Use the **Mute**  button in order to avoid disrupting other callers.

Note: You may add up to 3 to your conference call for a total of 4 conferees.

Dropping the last caller from a conference call

While on a conference call the user can drop the last person who had been added to the conference call.

1. Press the **More Softkey**.
2. Choose **RmLstC (remove last caller) Softkey**. The last person is dropped from the call.

Remove Conference Participants

Allows the conference initiator to drop participants from the conference call by using **Remove or Remove Last Conference Participant**:

- **Remove** drops the selected participant
- **Remove Last Conference Participant** drops the most recently added participant.

To find the **Remove Softkey**, the user will need to first hit the **More Softkey** located at the bottom right hand corner of the LCD screen.

Associated **Softkeys**: **Remove** and **RmLstC**

View Conference List

This feature allows you to view current participants in a conference call.

Associated **Softkey**: **ConfList**

To find the **Conference List Softkey**, press the **More** softkey. This will then bring up another set of **Softkeys** at the bottom of the LCD screen. Press the **ConfList** softkey to see the conference participants. When a participant is added or removed, the existing participants will hear a tone through the handset. They can then press the **Update** softkey to see the changes in the participant list.

The ConfList is a “snapshot” of the conference call. To clear the screen, the user should hit the **Exit Softkey** twice to return to the normal phone screen.

Join

Allows you to join two or more calls that are on one line to create a conference call. You remain on the call.

Associated **Softkey: Join**

Using the Mute Button

The mute button will allow the user to prevent the caller from hearing what the user or someone in the user's room is saying.

To Mute the Handset, Speakerphone, or Headset

The mute functions the same way regardless of which voice receiver is being used.

1. Press the **Mute** button on the lower right corner of the phone base to mute the user's end of the conversation.
2. Press the **Mute** button again to allow the caller to hear the user's end of the conversation.

Customizing the Phone Settings

Adjusting the Volume Level

The volume level can be adjusted for whichever voice receiver (handset, speakerphone, or headset) is currently active.

Adjusting the Handset Volume

1. Lift the **Handset** from the cradle.
2. Press the **Up or Down Volume Arrows** located on the lower right side of the phone base.
3. Press the **Softkey** located directly below the word **Save** on the LCD screen to save the changes.
4. Hang up the **Handset** to hang-up.

Adjusting the Speakerphone Volume

1. Press the **Speaker** button. Press the **Up or Down Volume Arrows** located on the lower right side of the phone base. Press the **Softkey** located directly below the word **Save** on the LCD screen to save the changes.
2. Press the **Speaker** button to hang up.

Adjusting the Headset Volume

1. Press the **Headset** button.
2. Press the **Up or Down Volume Arrows** located on the lower right side of the phone base.
3. Press the **Softkey** located directly below the word **Save** on the LCD screen to save the changes.
4. Press the **Headset** button to hang up.

Adjusting the ringer volume

1. Press the **Up and Down Volume Arrows** located on the lower right side of the phone base.
2. The ringer will automatically play. Continue pressing the **Up or Down Volume Arrows** until the desired ringer level is reached.

Changing the ringer sound

There are 25 different ringer sounds to choose from.

1. Press the **Settings** mode button located on the lower right side of the phone base.
2. Press the number **1** on the number pad to select the **Rings** option. For the primary line on the set, remain on the DEFAULT ring line of the phone, otherwise you will change the ring for other lines on the set.
3. The **Ring Type** menu list is displayed. To select a ring type, press the **Up and Down Scroll Arrows**, located below the LCD screen to highlight the desired ring.

-OR-

Using the number pad, press the number that corresponds to the desired sound to select that ring type.

1. Press the **Softkey** located directly below the word **Play** on the LCD screen to hear the selected ring type.
2. Repeat steps 3-4 until the desired ring type is found.
3. Press the **Softkey** located directly below the word **Select** on the LCD screen, in order to choose the highlighted ring type.
4. Press the **Softkey** located directly below the word **Save** on the LCD screen to save the changes.

Making Calls from the Corporate Directory

1. Press the **Directories** button.
2. Press the **5** on the number pad or use the **Down Scroll Button** to highlight **Corporate Directory** and then press the **Select the Softkey**.
3. The Directory Search screen appears. Use the **Number Pad** to type in a person's first name if desired. For example, if the person's name was Anne Smith, the user would press **2** once because the letter A is the first letter on the 2 button. Pause for a second. Then the user would press **6** twice because the letter N is the second letter on the 6 button. Pause for a second. Press the **6** twice for the second N. (NOTE: if a mistake is made, press the **<<Softkey** to backspace.)
4. Press the **Scroll Down Arrow** to move to the **Last Name** field.
5. Follow the same procedure as in step 3. (NOTE: it is not necessary to enter a person's entire name in order to query the directory. Users may enter the first few letter of a person's first or last name for their query.)
6. Press the **Search Softkey**.
7. The number is displayed on the LCD screen. Lift the **Handset** (or press the **Speaker** or **Headset** button) and the number is

- automatically dialed.
8. If there are multiple listings returned in the search, use the **Scroll Down Arrow** to highlight the desired entry before lifting the receiver.

Using the Call History

Through the directory services users can see a list of missed, received, or recently placed calls.

Viewing a List of Missed Calls

1. Press the **Directories** mode button.
2. Press the number **1** on the number pad to select the Missed Calls option.
3. A list of recently missed calls displays. The date and time of the missed call is displayed along the bottom of the LCD screen.
4. To select a different missed call, use the **Scroll Down Button** to highlight the desired listing.
5. Press the **Dial Softkey** to dial the highlighted record.
6. If the user does not wish to dial the number, press the **directories** mode button again to exit the directory.

Viewing a List of Received Calls

1. Press the **Directories** mode button.
2. Press the number **2** on the number pad to select the Received Call option.
3. A list of recently received calls displays. The date and time the call was received is displayed along the bottom of the LCD screen.
4. To select a different received call, use the **Scroll Down Button** to highlight the desired listing.
5. Press the **Dial Softkey** to dial the highlighted record.
6. If the user does not wish to dial the number, press the **directories** button to exit the directory.

Viewing a list of Placed Calls

1. Press the **Directories** mode button.
2. Press the number **3** on the number pad to select the Placed Calls option.
3. A list of recently placed calls displays. The date and time the call was placed is displayed along the bottom of the LCD screen,
4. To select a different placed call, use the **Scroll Down Button** to highlight the desired listing.

5. Press the **Dial Softkey** to dial the highlighted record.
6. If the user does not wish to dial the number, press the **Directories** button to exit the directory.

Help and Support

If you are experience problems with your phone or voicemail. Contact the Help Desk at 800-799-7472 or Helpdesk@tamhsc.edu

Texas A&M Health Science Center

Office of Information Technology

Help desk: 800 799 7472

Helpdesk@tamhsc.edu

It.tamhsc.edu